
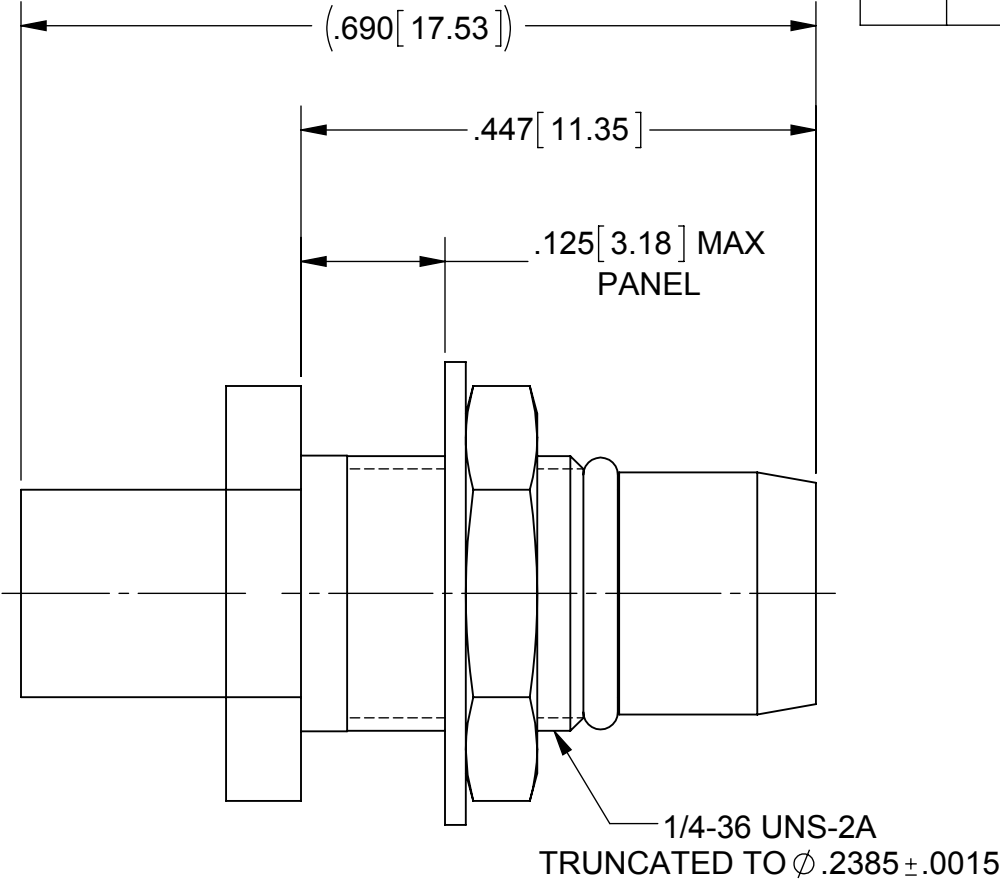


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
B	DCN 41831	10/15	STW

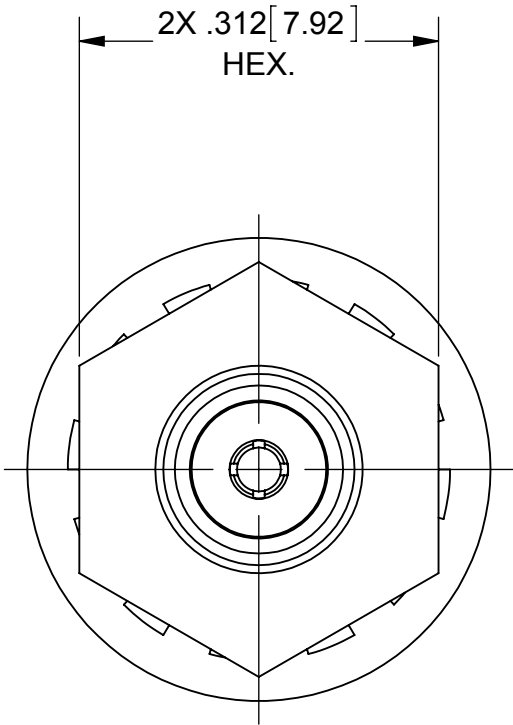

MATERIAL:

- BODY &
HEX NUT:

STAINLESS STEEL PER AMS-5640,
ALLOY UNS S30300, TYPE 1
- CONTACT:

BERYLLIUM COPPER PER ASTM B196,
- GASKET:

FLUORCARBON RUBBER PER MIL-R-832488
TYPE 1, CLASS 1.
- INSULATOR:

PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B
- LOCK WASHER:

STAINLESS STEEL

FINISH:

- BODY &
CONTACT:

GOLD PER ASTM B488, TYPE II,
CODE C, CLASS .76, OVER NICKEL
PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

- HEX NUT &
LOCK WASHER:


PASSIVATED PER AMS-2700

PERFORMANCE:

- IMPEDANCE:

50 OHMS
- FREQ. RANGE:

DC TO 18.0 GHz

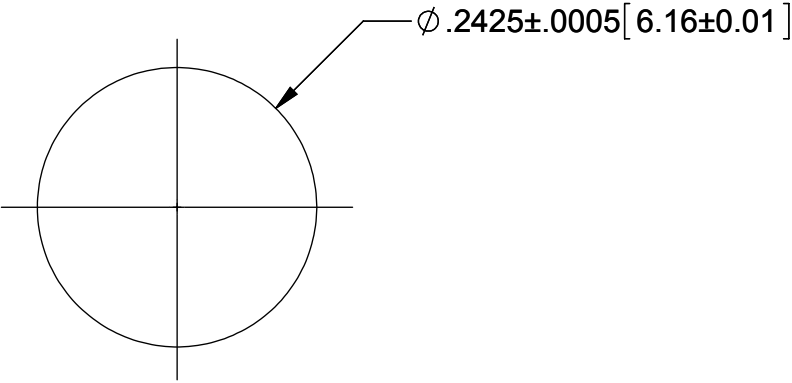

RECOMMENDED MOUNTING HOLE

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/64$ ANGULAR: X° $\pm 1^{\circ}0'$
-----------	-----------	--