
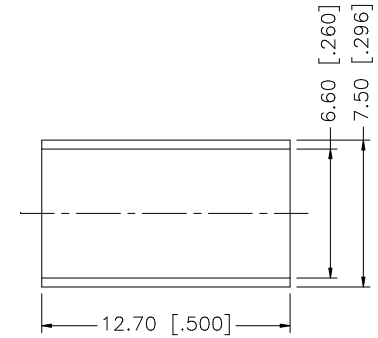
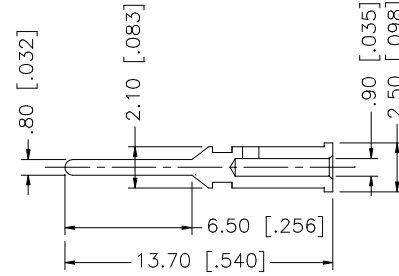
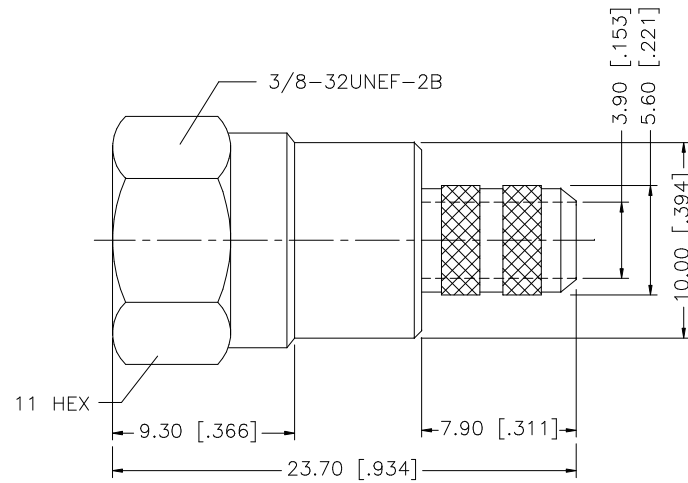


REV.	DATE	DESCRIPTION
A	03/06/03	UPDATE DRAWING FORMAT

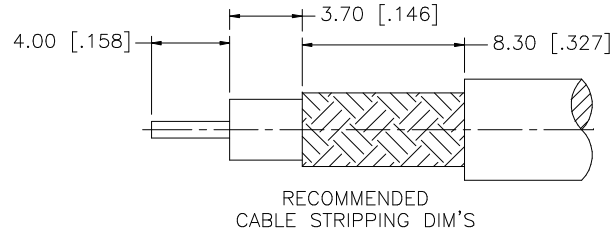

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex							
7						DRAWN	G.R.S.						03/06/03		
6					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	CHECKED		PART DESCRIPTION							
5	FERRULE	BRASS	NICKEL	1		ISSUED		F CRIMP PLUG (FOR RG-59/U 20AWG – BELDEN 9100)							
4	BARREL	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	SHEET	1 OF 1	PART NO.							
3	CONTACT PIN	BRASS	GOLD	1				222119							
2	INSULATOR	DELRIN	NATURAL	1	DO NOT SCALE DRAWING	CAD FILE	C:/222/222119.DWG	DWG. NO.	222119.DWG	REV.	A	SIZE	A	SCALE	NA
1	SHELL/BODY	BRASS	NICKEL	1											
	DESCRIPTION	MATERIAL	FINISH	QTY											