

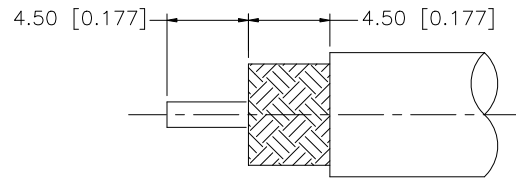
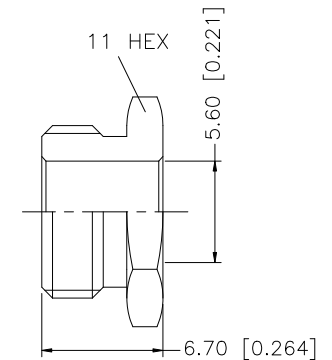
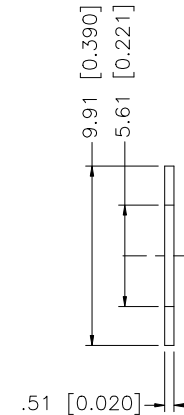
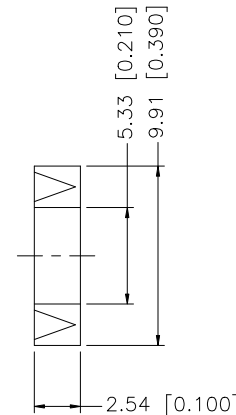
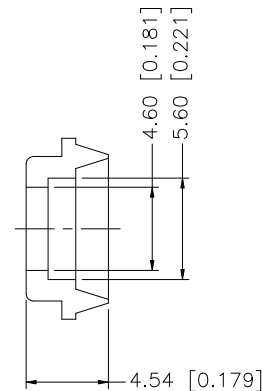
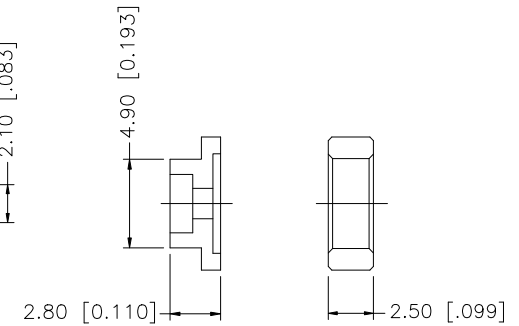



REV.	DATE	DESCRIPTION
NC	07/13/04	INITIAL RELEASE
A	01/20/08	REMOVE NOTES, REVISE INSULATOR TO DELRIN.



RECOMMENDED CABLE STRIPPING DIMS

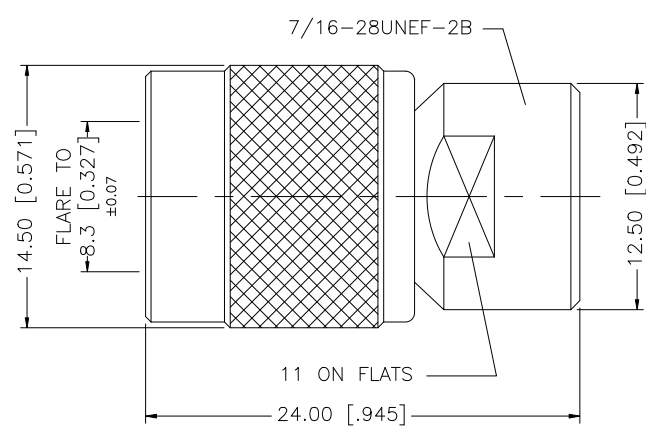

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	G.R.S.	01/20/08						
7	CONTACT PIN	BRASS	NOTE 2	1		CHECKED				PART DESCRIPTION TNC CLAMP PLUG (FOR RG–58C/U, 58/U, 142A/U, 223/U CABLE)				
6	HEX NUT	BRASS	NICKEL	1		ISSUED								
5	WASHER	BRASS	NICKEL	1		SHEET		1 OF 1		PART NO. 122274				
4	GASKET	SILICONE	RED	1		CAD FILE C:/122/122274.DWG								
3	BRAID CLAMP	BRASS	NICKEL	1										
2	INSULATOR	DELTRIN	NATURAL	1										
1	BODY	BRASS	NICKEL	1										
	DESCRIPTION	MATERIAL	FINISH	QTY										