
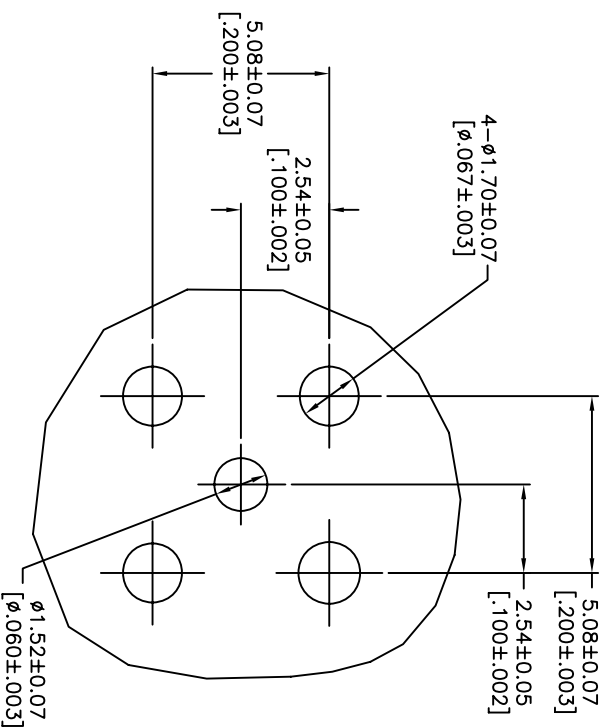


REV.	DATE	ECR NO.	DESCRIPTION
NC	11/19/10	XXXXXX	INITIAL RELEASE

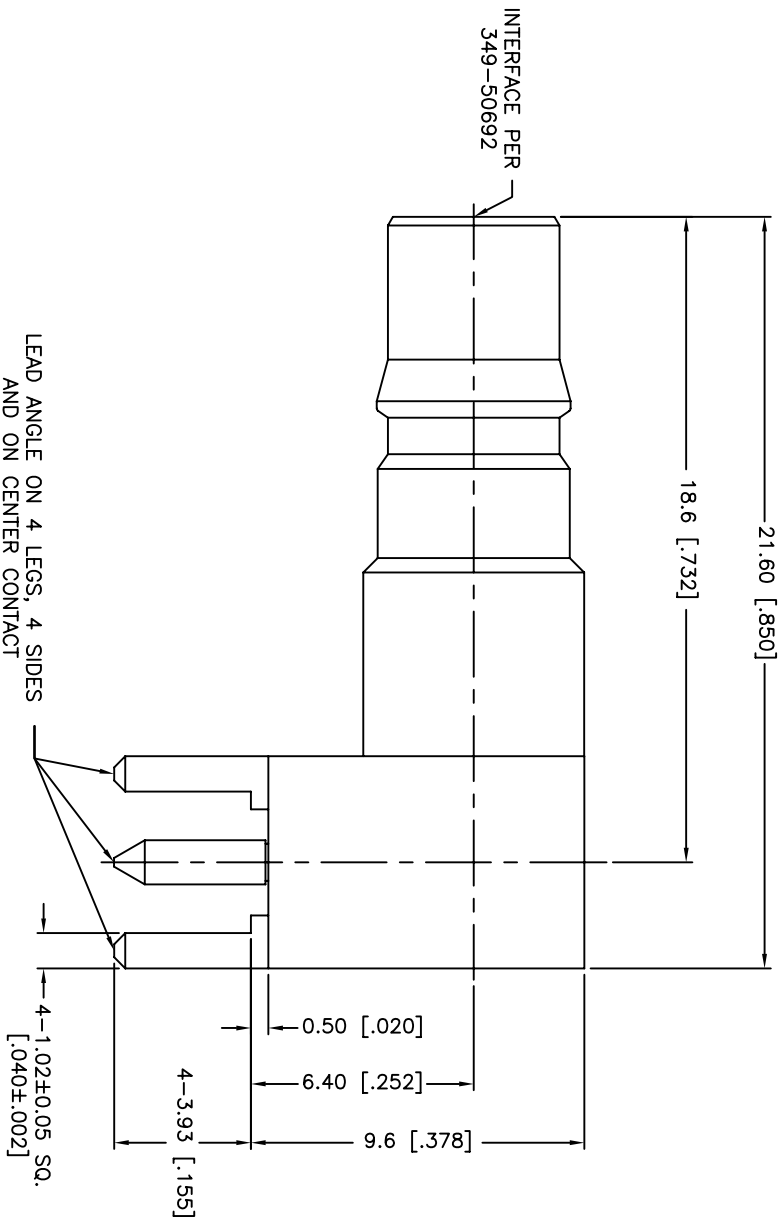

RECOMMENDED PCB HOLE PATTERN

1. DURABILITY: 100 CYCLES MIN.
2. TEMPERATURE RANGE: -40°C TO +80°C
3. FREQUENCY RANGE: DC - 6.0 GHz

Amphenol Connex

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS (INCHES IN PARENTHESES) AND FOR CUSTOMER REFERENCE ONLY.			UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR MILLIMETERS ARE:			UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR INCHES ARE:		
5	COVER PLATE	BRASS	NEXCOTE	1		0.5 - 8mm ± 0.20mm		
4	INSULATOR-REAR	PTFE	NATURAL	1		8 - 30mm ± 0.40mm		
3	BODY	BRASS	GOLD	1		30 - 120mm ± 0.50mm		
2	CONTACT PIN	BERYLLIUM COPPER	GOLD	1		0.020 - .315 = ± 0.007"		
1	INSULATOR	PTFE	NATURAL	1		.315 - 1.180 = ± 0.015"		
						1.180 - 4.724 = ± 0.020"		
DESCRIPTION			MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING		
APPROVALS			DATE			C:\CONNEX\134100.DWG		
DRAWN M.ZHANG			11/19/10			DWG. NO. 134100.DWG		
CHECKED						REV. NC		
ISSUED						SIZE A		
SHEET 1 OF 1						SCALE NA		
PART NO.			134100					
PART DESCRIPTION			QMA JACK, RIGHT ANGLE, PCB MOUNT					