


NOTES:

1. MATERIALS AND FINISHES:
BODY - BRASS, NICKEL PLATING
CONTACT - BERYLLIUM COPPER, GOLD PLATING
LOCKWASHER - BRASS, NICKEL PLATING
HEX NUT - BRASS, NICKEL PLATING
INSULATOR - PTFE, NATURAL
O-RING - SILICONE RUBBER, RED
GASKET - SILICONE RUBBER, RED


2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC-18 GHz
C. VSWR: 1.20 MAX @ DC-11 GHz
1.30 MAX @ 11-18 GHz
D. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.

3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65°C TO +165°C


4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: PACKAGING TO BE MARKED
"AMPHENOL RF, AD-TNCJTNCJ-1 & DATE CODE"

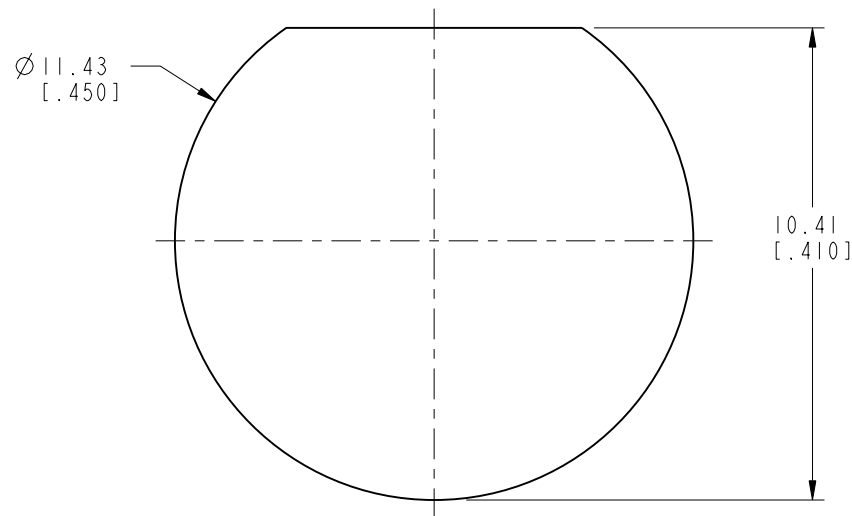

RECOMMENDED PANEL HOLE DIMENSIONS

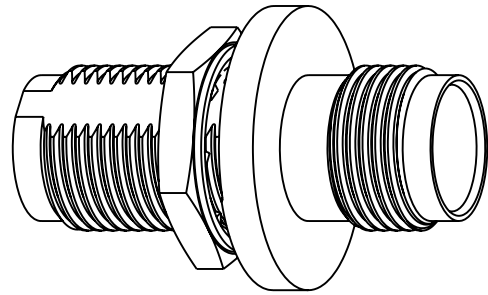

INTERFACE PER
MIL-STD-348
SERIES: TNC
JACK
TYP(2)

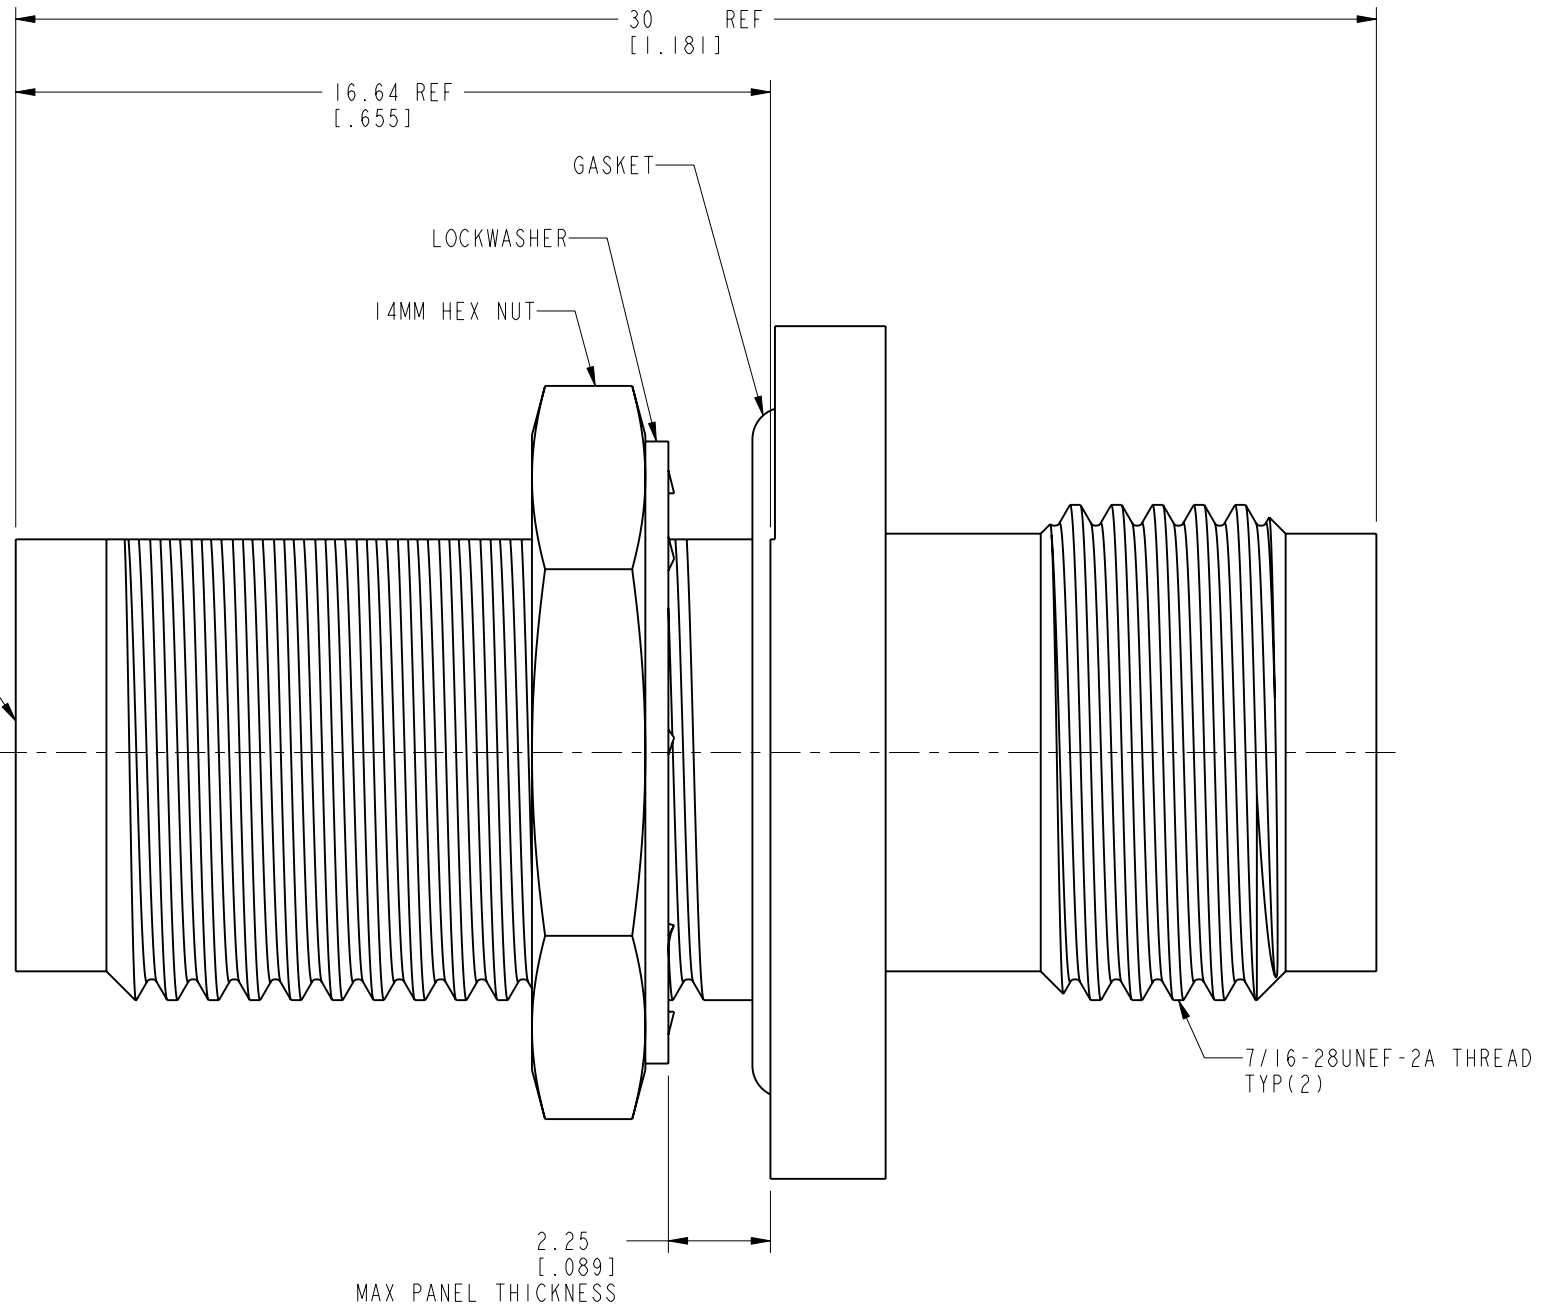

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ± 1°	MATERIAL	DRAWN	DATE	TITLE		Amphenol RF www.amphenolrf.com	
	SEE NOTES	M. ZHANG	11-Mar-20				
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	REFERENCE	E. HILL	12-Aug-19	PERFORMANCE GRADE TNC JACK TO TNC JACK IP67 BULKHEAD ADAPTER		DRAWING NO. AD-TNCJTNCJ-1	
	EAR# 9261	APPROVED	DATE			ITEM NO. AD-TNCJTNCJ-1	
	REF: ---	S.HSIEH	12-Mar-20	SCALE: 6.0:1.0 SHEET 2 OF 2		PART NO. AD-TNCJTNCJ-1	
	CONFIGURATION LEVEL: In Work	CAD FILE		DWG SIZE	REV		
	FINISH			B	A		