

NOTES:

1. MATERIALS AND FINISHES:

BODY - BRASS, GOLD PLATING
CONTACT - BERYLLIUM COPPER, GOLD PLATING
INSULATOR - PTFE , NATURAL

2. ELECTRICAL:

A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 6 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS, MIN.


3. MECHANICAL:

A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65°C TO +165°C




THIRD ANGLE PROJ. 

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
NC	INITIAL RELEASE	29-Aug-02	-----	GRS
D	SYNC, ADDED A D-FLAT INTO THE SMALL INSULATOR	19-Jan-18	06601	SH



SCALE 5.000

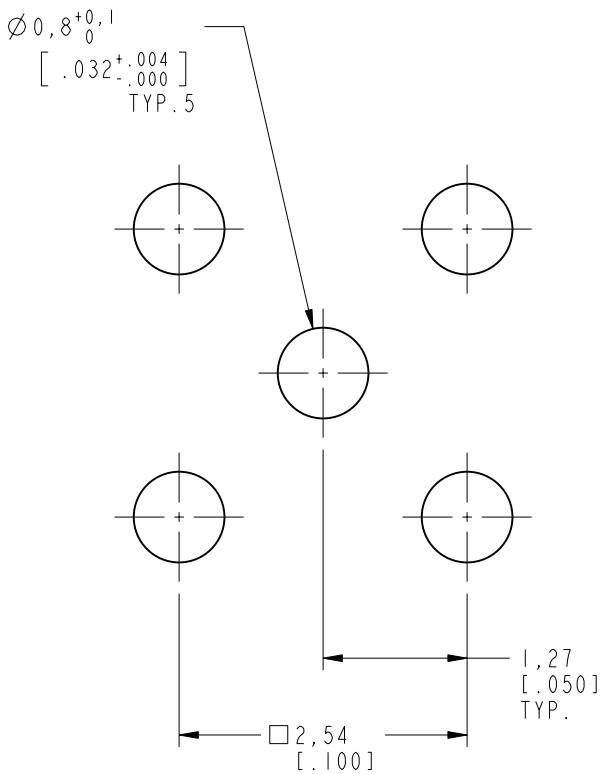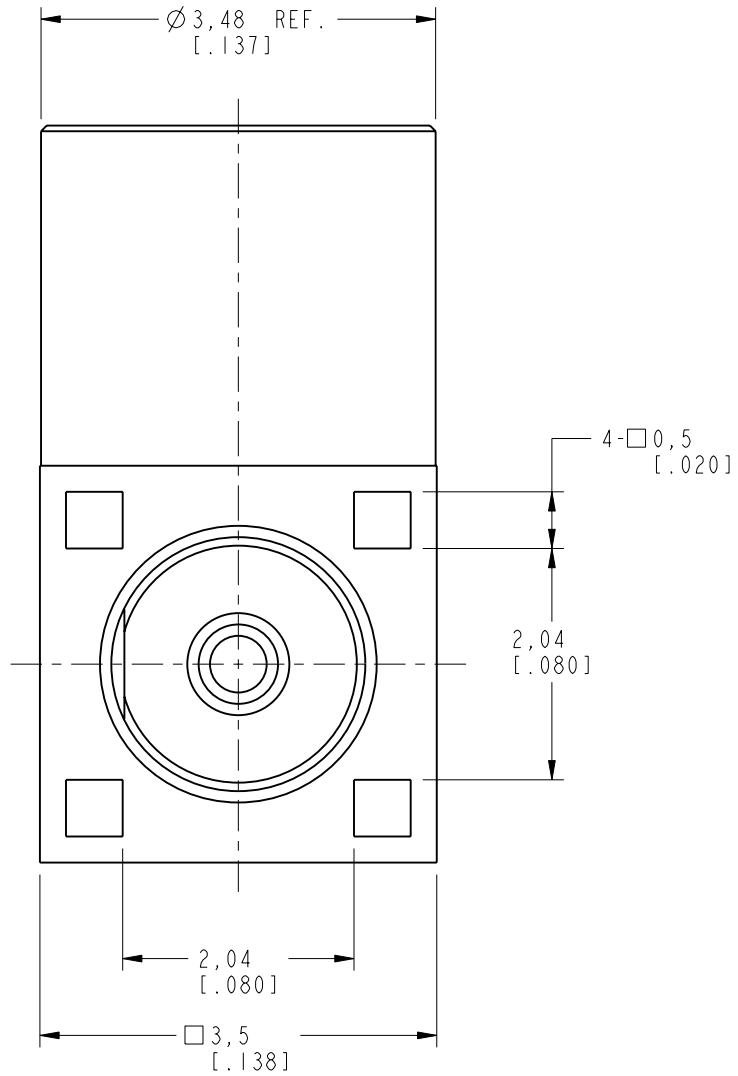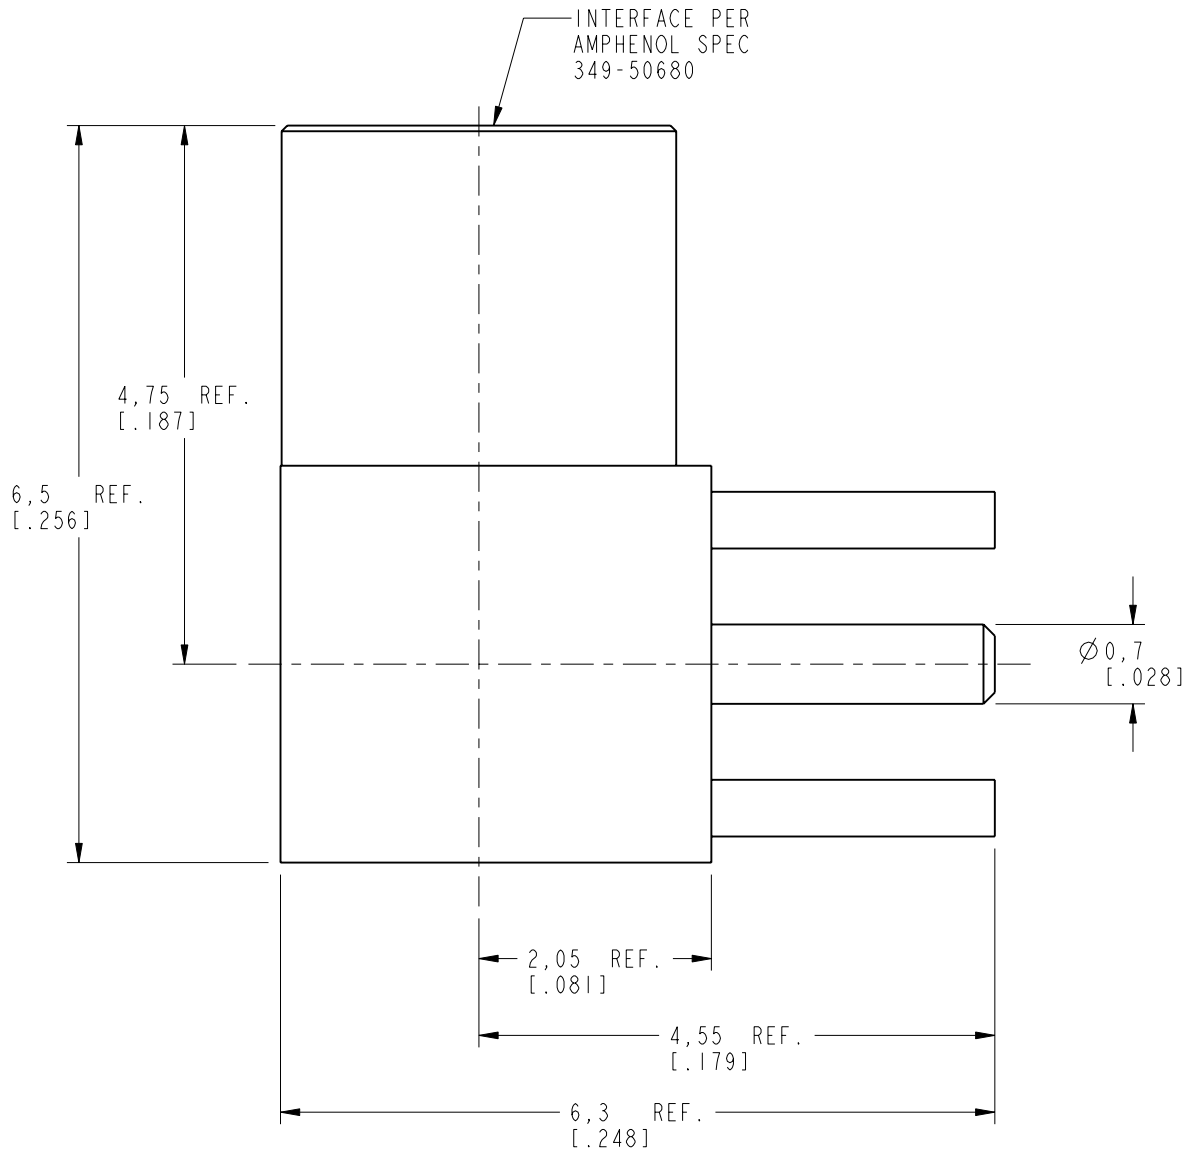

RECOMMENDED
MOUNTING PATTERN

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL -	DRAWN M. ZHANG	DATE 19-Jan-18	TITLE MMCX R/A PCB JACK		Amphenol RF www.amphenolrf.com	
		ENGINEER F. WANG	DATE 20-Feb-14				
	REFERENCE AND CONFIGURATION LEVEL: In Work	APPROVED S. HSIEH	DATE 19-Jan-18	SCALE: 15.0:1.0		SHEET	2 OF 2
		CAD FILE	DWG SIZE B		REV D		
		FINISH					
						DRAWING NO. MMCX6252N3-3GT30G-50	
						ITEM NO. 096252AAC10GE5F	
						PART NO. 262105	