
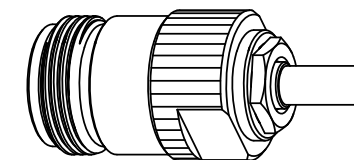


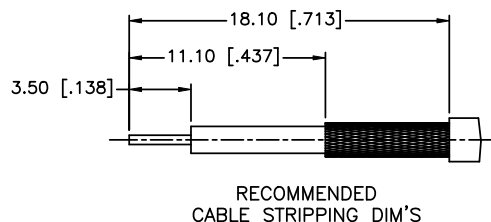
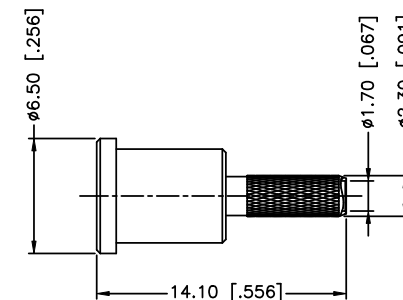

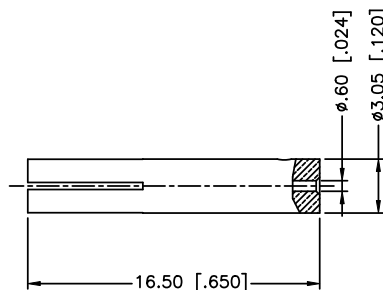


NOTES:

- ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC TO 11 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE: 2500 VRMS, MIN.
- MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65°C TO +165°C
- CRIMPED FERRULE
HEX. CRIMP SIZE .151"
- CRIMPED CONTACT PIN
HEX. CRIMP SIZE .100"

ГК Атлант Инжиниринг – официальный представитель в РФ и СНГ
+7 (495) 109-02-08 sales@bbrc.ru www.bbrc.ru

REV.	DATE	ECN NO.	DESCRIPTION
NC	11/01/00	XXXXXX	INITIAL RELEASE
A	09/23/11	2230	PLATING WAS CHANGED

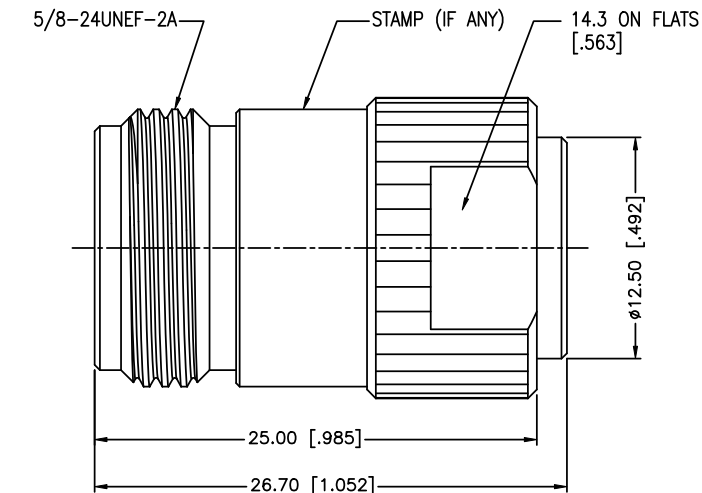

SCALE 0.500

6	FERRULE	COPPER	NEXCOTE	1
5	HEX. NUT	BRASS	NEXCOTE	1
4	BARREL	BRASS	NEXCOTE	1
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
2	INSULATOR	PTFE	NATURAL	2
1	BODY	BRASS	NEXCOTE	2
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"
DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN T.DENG	09/23/11
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/172205.DWG

Amphenol Connex				
PART DESCRIPTION				
N STRAIGHT CRIMP JACK				
PART NO. 172205				
DWG. NO.	172205.DWG	REV.	A	SIZE A
				SCALE NA