
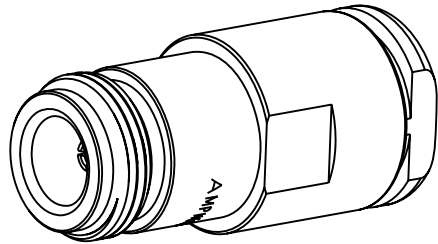
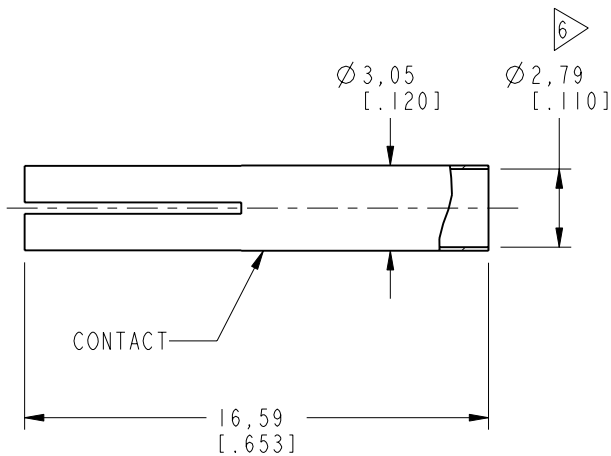



NOTES:

1. MATERIALS AND FINISHES:
BODY, CLAMP NUTS, WASHER - BRASS, NICKEL PLATING
CONTACT - BeCu, SILVER PLATING
WASHER - COPPER, NICKEL PLATING
INSULATOR - PTFE, NATURAL
GASKET - SILICONE RUBBER, RED
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65° C TO +165° C
4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, 82-209-1006, AND DATE CODE"
5. CABLE ASSEMBLY INSTRUCTIONS:
A. STRIP CABLE AS SHOWN.
B. SLIDE CLAMP NUT, WASHER, GASKET, BRAID CLAMP & WASHER OVER CABLE SHEATH.
C. COMB OUT THE BRAID AND FOLD OUT, TRIM EXCESS BRAID.
D. SOLDER CABLE CENTER CONDUCTOR TO CENTER CONTACT.
LEAD FREE SOLDER IS RECOMMENDED.
E. SLIDE SUB-ASSEMBLY TO THE REAR SIDE OF THE BODY AND TIGHTEN WITH PROPER SPANNER. MAKE ENSURE INTERFACE DIMENSIONS TO MEET.

6 SHOWS CABLE ENTRY DIMENSIONS.


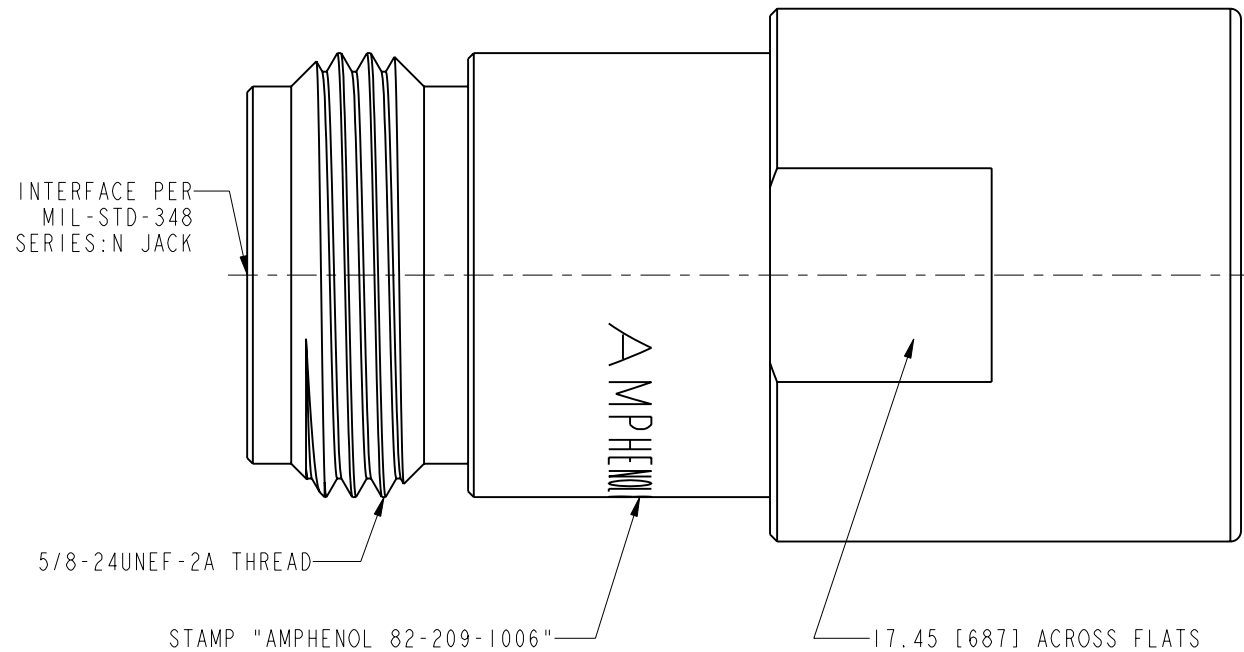


SCALE 1.400

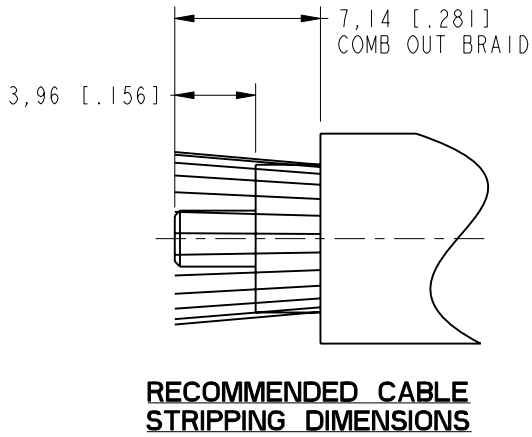

THIRD ANGLE PROJ.

REVISIONS				
REV	DESCRIPTION	DATE	ECO	APPR
--	RELEASE TO MFG.	--	--	--
E	REDRAWN IN PRO-E & COD SHEET ADDED	23-Apr-15	50409	HHE

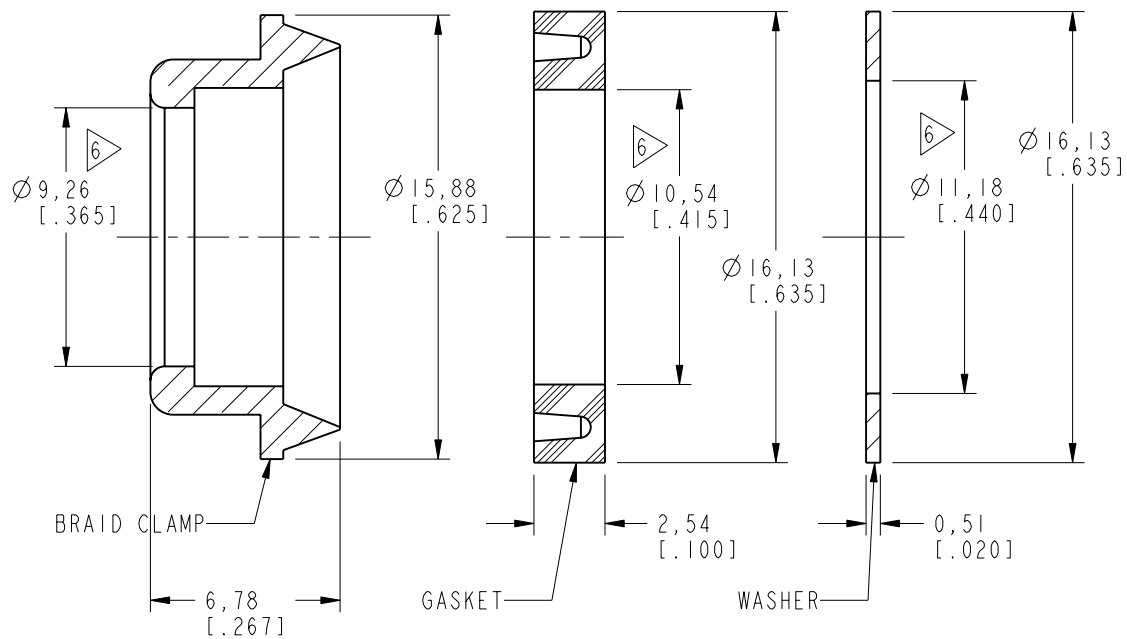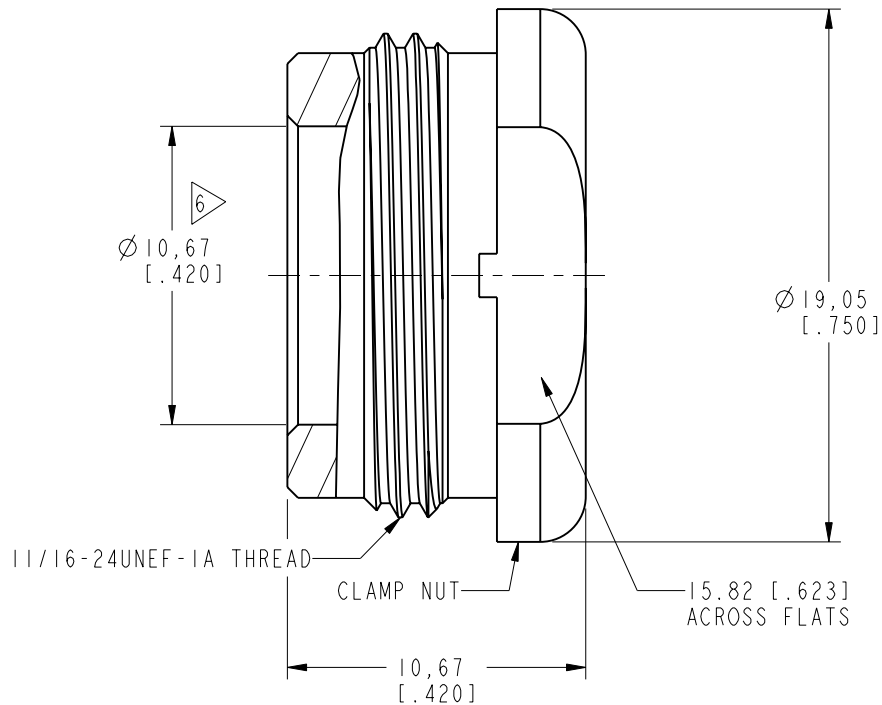

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL SEE NOTES	DRAWN M. ZHANG	DATE 23-Apr-15	TITLE N STR JACK FOR BELDEN 9913 CABLE		Amphenol RF www.amphenolrf.com	
		ENGINEER D. ROYCE	DATE 06-Feb-86				
		REFERENCE EAR # 112-978772-52 AND 611X-2819	APPROVED H. HE	DATE 23-Apr-15	SCALE: 3.7:1.0 SHEET 2 OF 2		DRAWING NO. 82-209-1006
		CONFIGURATION LEVEL: In Work	CAD FILE		DWG SIZE B	REV E	ITEM NO. 82-209-1006
		FINISH					PART NO. 82-209-1006