





NOTES:

1. MATERIALS AND FINISHES(PLATING THICKNESS IN MICRO-INCHES):
BODY - PHOSPHOR BRONZE, NICKEL PLATING
CONTACT - BRASS, GOLD PLATING
INSULATOR - PTFE
2. ELECTRICAL:
A. IMPEDANCE: 75 OHM
B. FREQUENCY RANGE: DC 0-1 GHz
C. VSWR(RETURN LOSS): 1.3 MAX.
D. DIELECTRIC WITHSTANDING VOLTAGE: 750 VRMS, MIN.
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: - 40°C to +155°C
4. CRIMPED FERRULE
HEX CRIMP SIZE .255"

031-70334		REVISIONS			
PART NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ.	A	RELEASE TO MFG.	27-Jul-06	8/1/06	CISSY

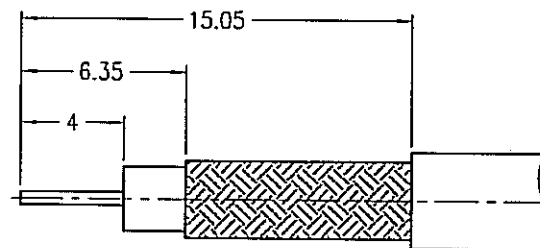

RECOMMENDED
CABLE STRIPPING DIM'S

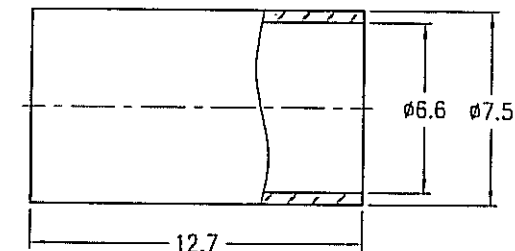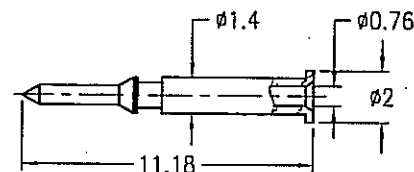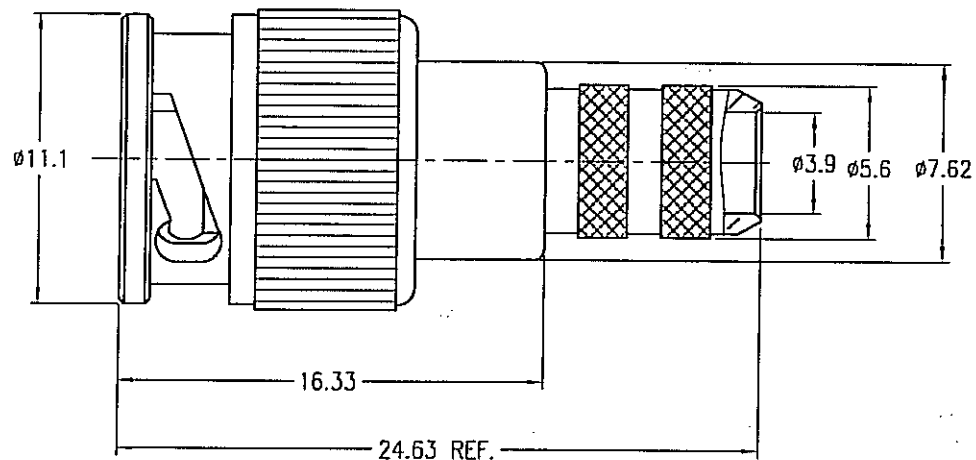

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
0.5 - 6mm ±0.1mm 6 - 30mm ±0.2mm 30 - 120mm ±0.3mm ANGLES ±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL	DRAWN	DATE	TITLE			Amphenol RF	
	CISSY	27-Jul-06					
	ENGINEER	DATE	MINI BNC CRIMP PLUG			Danbury CT USA, Tainan Taiwan, Shenzhen China www.amphenolrf.com	
	APPROVED	DATE					
REFERENCE	F:\DWG\MNB\1121A1\59U-75\NT30GSZ		SCALE: 3/1	SHEET	1 OF 1	DRAWING NO.	MNB1121A1-NT30G-59U-75
	FINISH		DWG SIZE	CODE ID	REV	ITEM NO.	311121AAA59NC7F
			B	74868	A	PART NO.	031-70334