

NOTES:

1. MATERIALS AND FINISHES:

- HEX NUT - BRASS, GOLD PLATING
LOCKWASHER - BRASS, GOLD PLATING
BODY - BRASS, GOLD PLATING
CONTACT - BERYLLIUM COPPER, GOLD PLATING
INSULATOR - PTFE, NATURAL

2. ELECTRICAL:

- A. IMPEDANCE: 50 OHM, NOMINAL
B. FREQUENCY RANGE: 0-6 GHz
C. D.W.V: 500 VRMS, MIN.

3. MECHANICAL:


- A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65°C TO +165°C

4. MAX. PANEL THICKNESS=5.3mm


THIRD ANGLE PROJ.

REVISIONS



REV	DESCRIPTION	DATE	ECO	APPR
NC	INITIAL RELEASE	07-Sep-99	-----	GRS
A	UPDATE DRAWING FORMAT, MODIFY THREAD CALL OUT	15-Dec-05	-----	GRS
D	SYNC, REDRAWN IN THE PRO/E	08-Mar-18	07166	SH

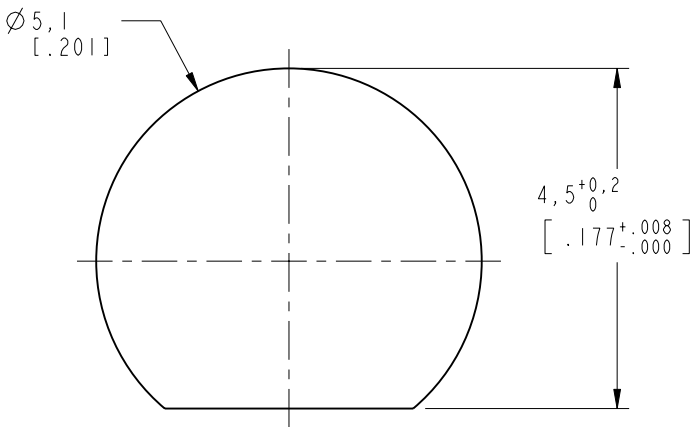

RECOMMENDED
MOUNTING HOLE

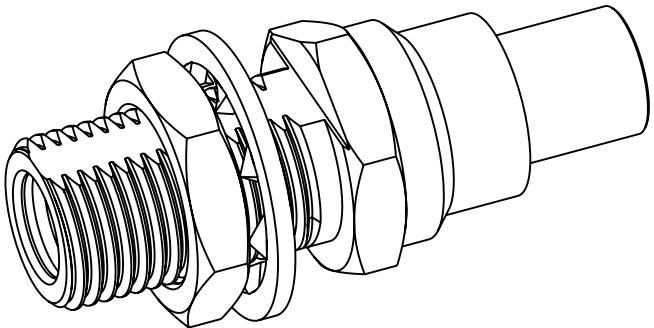

SCALE 5.000

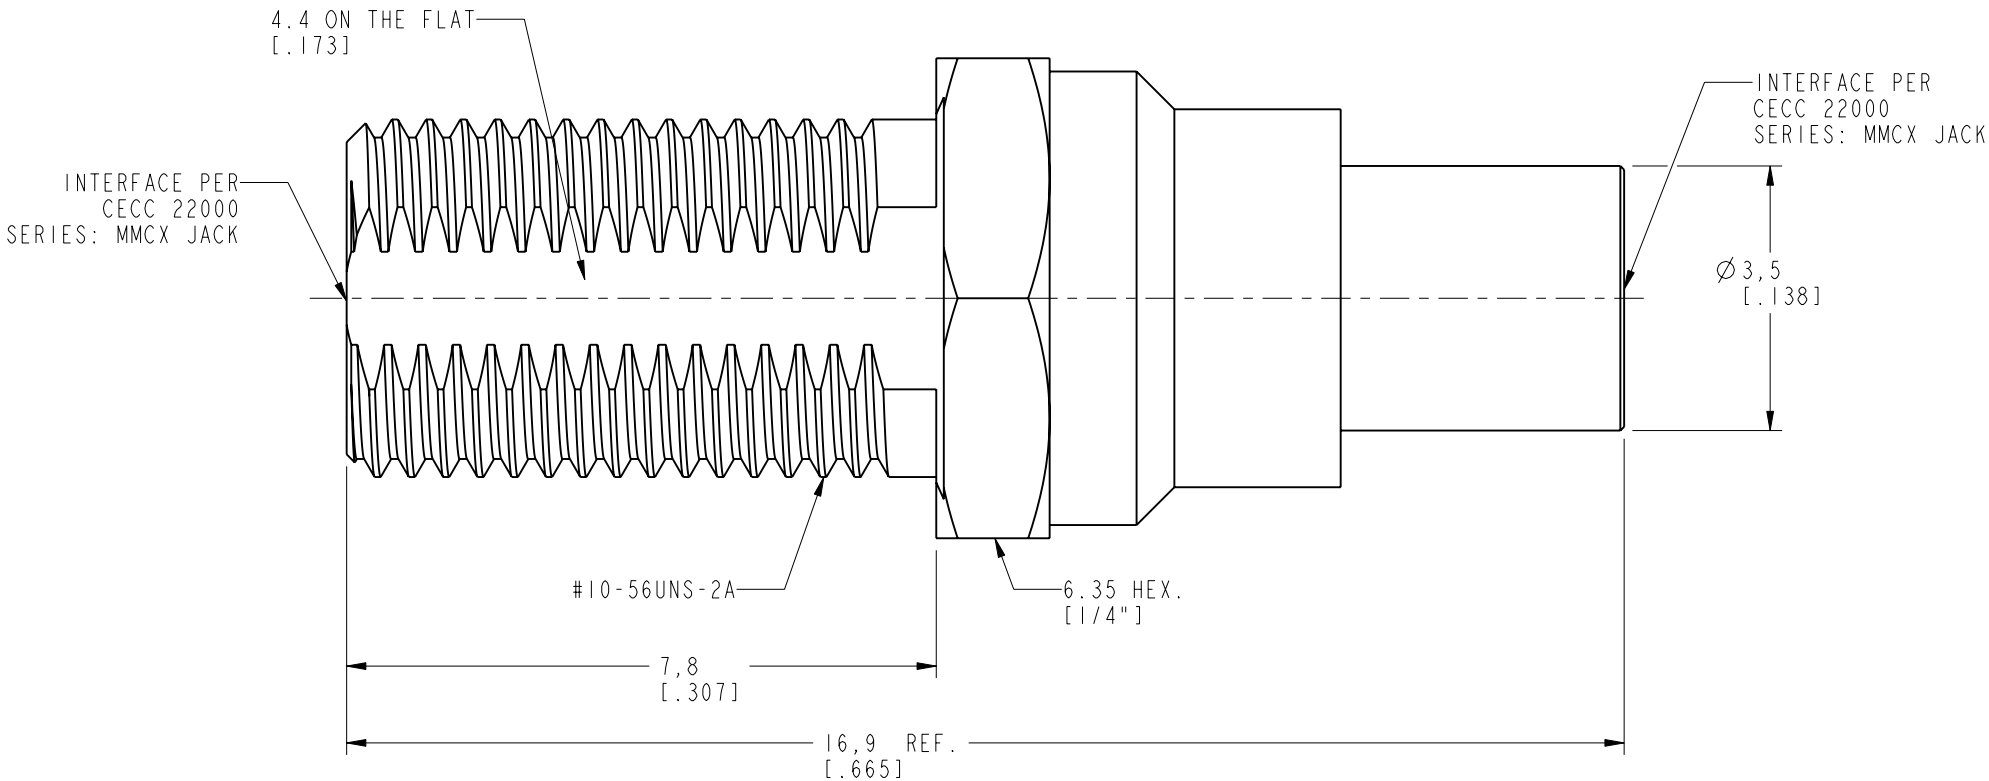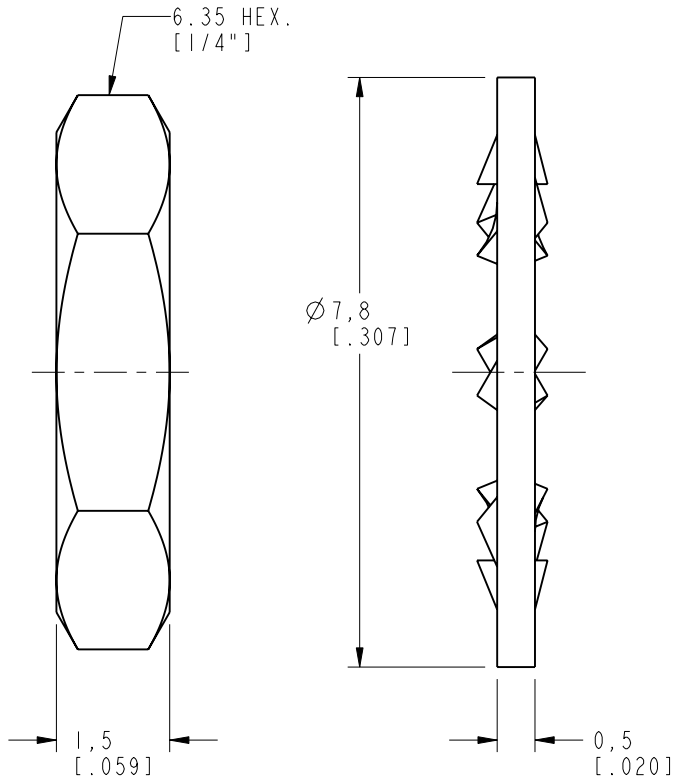

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ± 1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL - - REFERENCE AND CONFIGURATION LEVEL: In Work FINISH	DRAWN M. ZHANG	DATE 07-Mar-18	TITLE MMCX BULKHEAD JACK TO JACK ADAPTER SCALE: 10.0:1.0 SHEET 2 OF 2 DWG SIZE B	REV D	Amphenol RF www.amphenolrf.com DRAWING NO. MMCX7471A1-3GT30G-50 ITEM NO. 097471AAA00GE5F PART NO. 262130
		ENGINEER S. LI	DATE 29-Mar-11			
		APPROVED S. HSIEH	DATE 07-Mar-18			
		CAD FILE				