

NOTES:

1. MATERIALS AND FINISHES:

HEX NUT - BRASS, GOLD PLATING
LOCK WASHER - BRASS, GOLD PLATING
BODY - BRASS, GOLD PLATING
CONTACT PIN - BRASS, GOLD PLATING
INSULATOR - PTFE, NATURAL

2. ELECTRICAL:

A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 4 GHz
C. D.W.V: 1000 VRMS, MIN.

3. MECHANICAL:







A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65°C TO +165°C

4. PANEL THICKNESS=1.0~8.0mm

THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
NC	INITIAL RELEASE	18-May-03	-----	GRS
B	SYNC, ADDED THE PANEL CUTOUT & NOTES \N/A	19-Aug-15	50699	SH

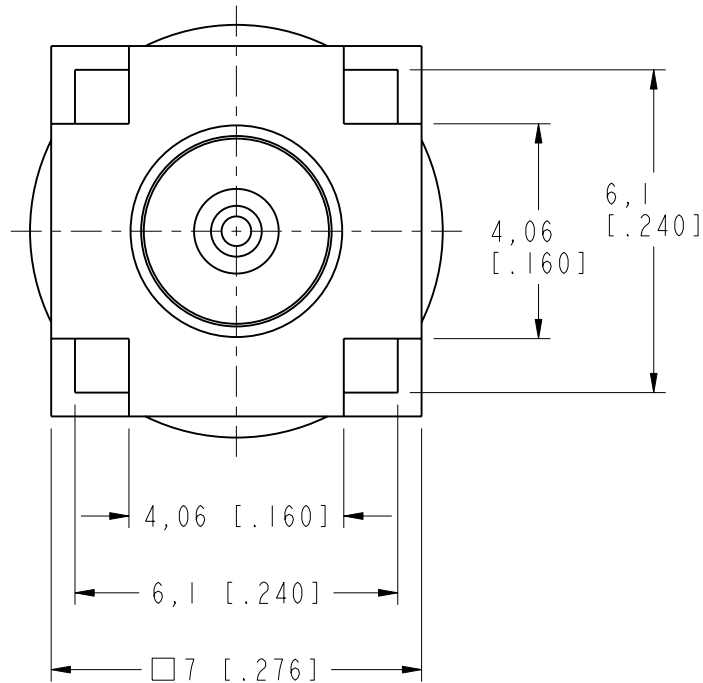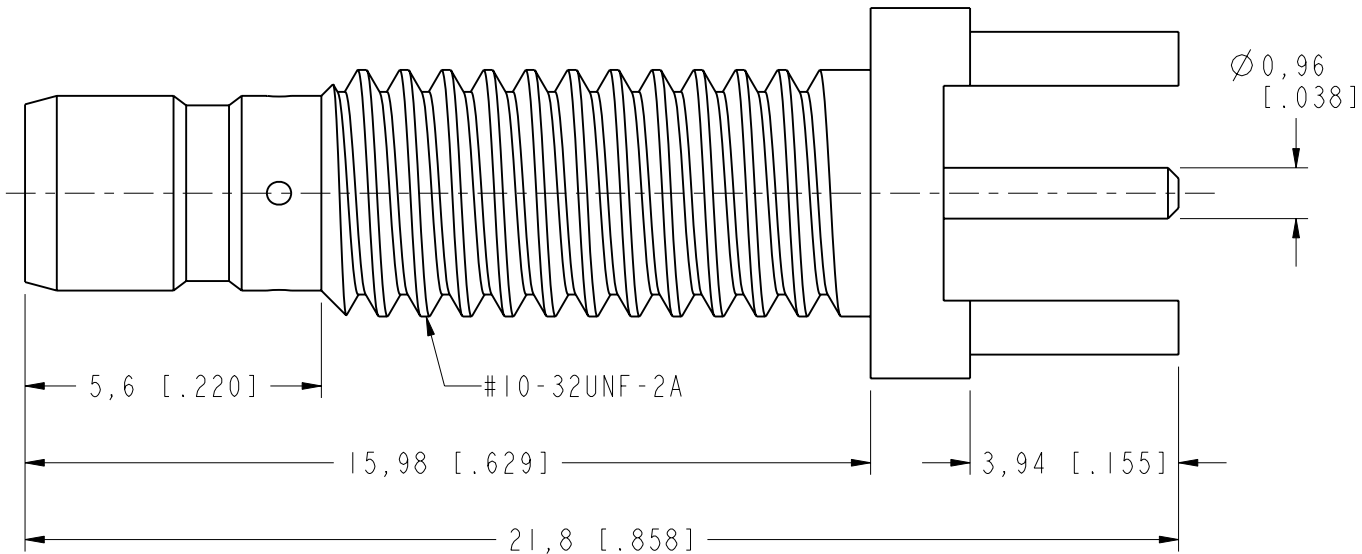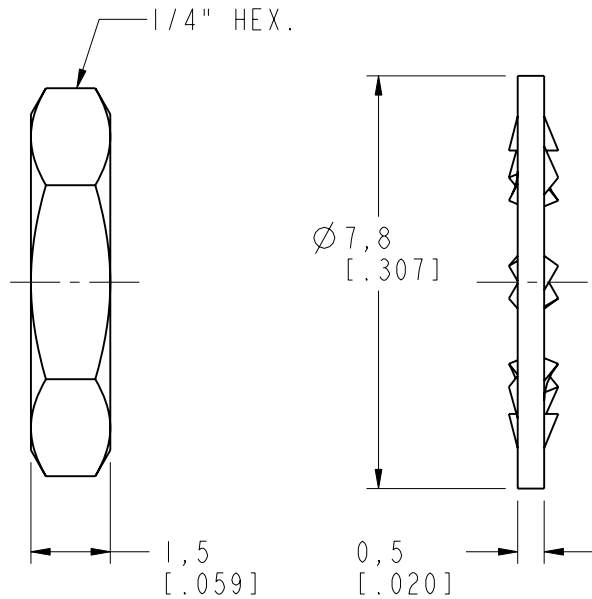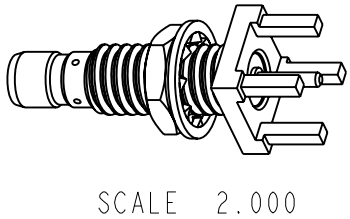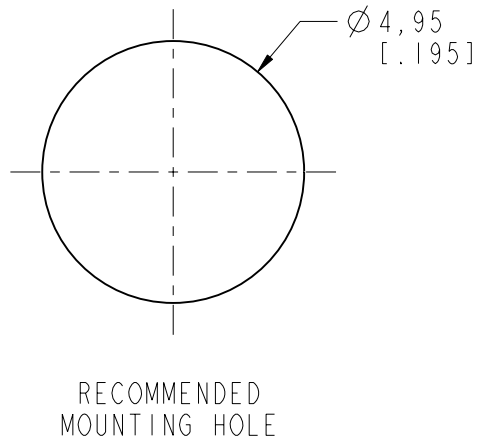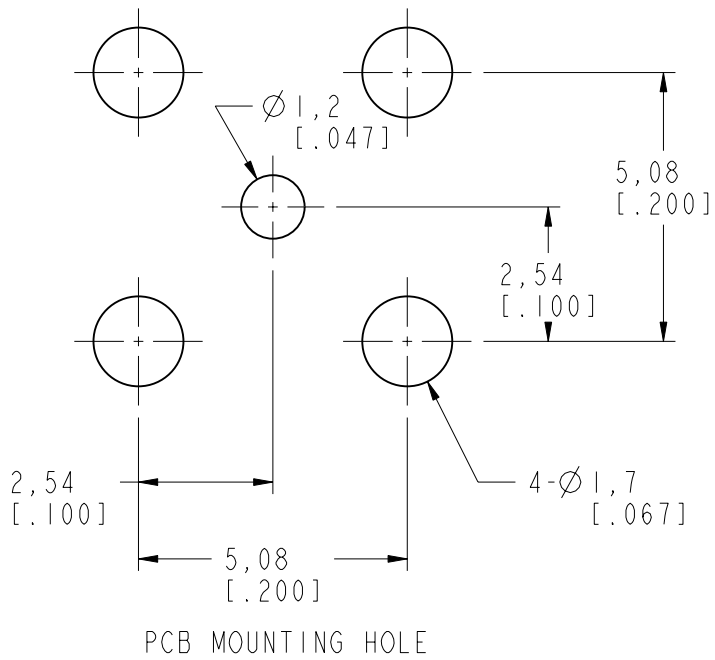

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ± 1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL	DRAWN M. ZHANG	DATE 11-Aug-15	TITLE SMB P.C. MOUNT & BULKHEAD JACK		Amphenol RF www.amphenolrf.com	
	REFERENCE AND CONFIGURATION LEVEL: In Work	ENGINEER N. CAO	DATE 08-Jul-03				
	FINISH	APPROVED S. HSIEH	DATE 11-Aug-15	SCALE: 7.0:1.0	SHEET 2 OF 2	DRAWING NO. SMB1451B1-007-3GT30G-50	ITEM NO. 121451AAG02GE5F
				DWG SIZE B	REV B	PART NO. 142210-10	