

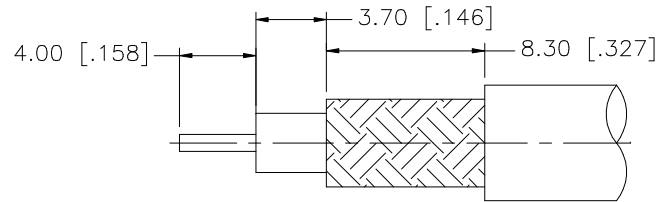
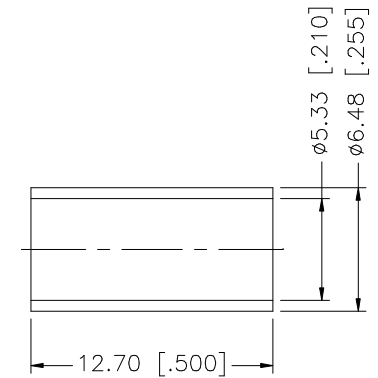


REV.	DATE	DESCRIPTION
NC	08/04/05	INITIAL RELEASE

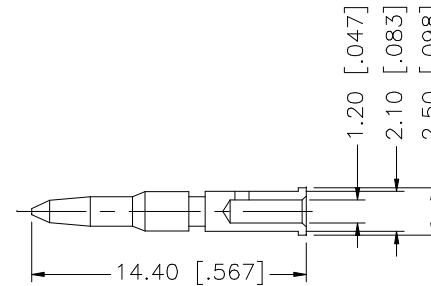

RECOMMENDED
CABLE STRIPPING DIM'S

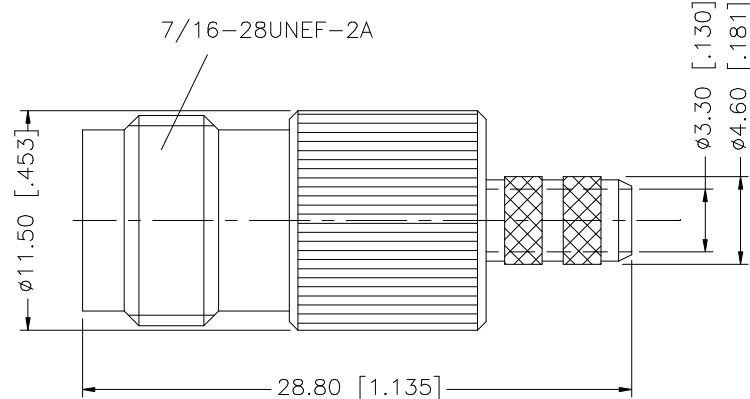

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex							
8						DRAWN	G.R.S.						08/04/05		
7						CHECKED									
6						ISSUED			PART DESCRIPTION						
5									TNC REVERSE POLARITY CRIMP JACK (FOR LMR 200 CABLE)						
4	FERRULE	COPPER	NICKEL	1				PART NO.							
3	CONTACT PIN	PHOS. BRONZE	GOLD	1			1 OF 1	122412RP							
2	INSULATOR	TEFLON	NATURAL	1				DWG. NO.							
1	BODY	BRASS	NICKEL	1				122412RP.DWG		REV.	NC	SIZE	A	SCALE	NA
	DESCRIPTION	MATERIAL	FINISH	QTY			CAD FILE	C:/122/122412RP.DWG							