
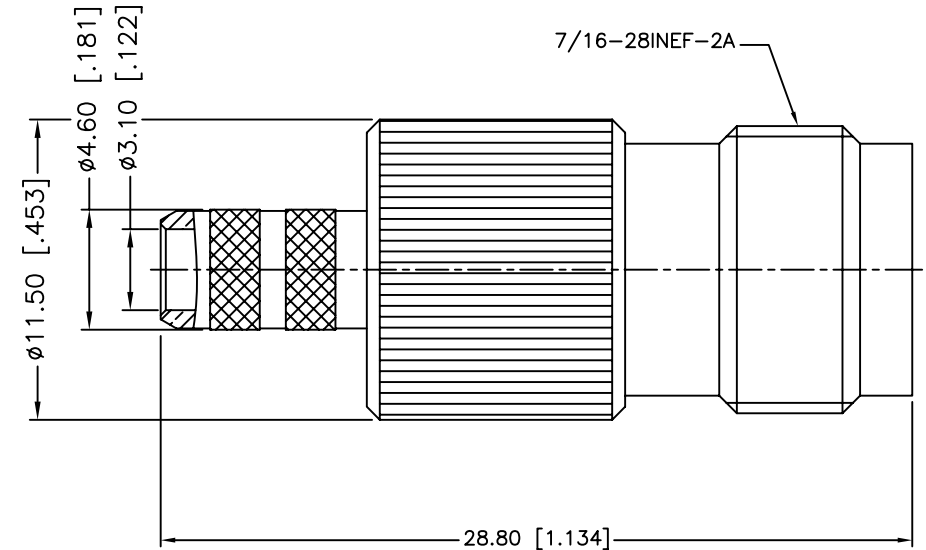
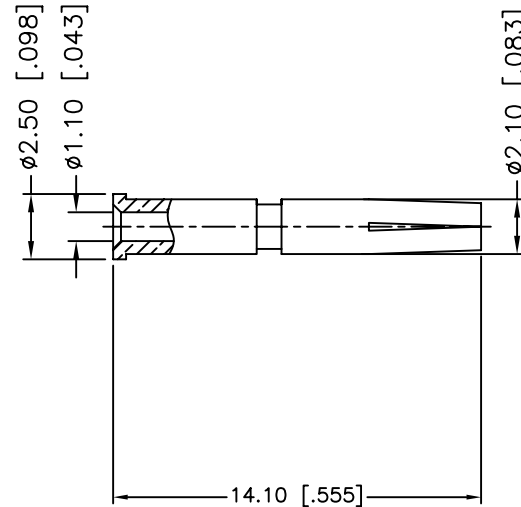


RECOMMENDED  
CABLE STRIPPING DIM'S

| REV. | DATE     | FOR NO. | DESCRIPTION                              |
|------|----------|---------|------------------------------------------|
| NC   | 09/01/98 | XXXXXX  | INITIAL RELEASE                          |
| A    | 05/01/04 | XXXXXX  | UPDATE DRAWING FORMAT                    |
| B    | 08/09/10 | XXXXXX  | ADD RG58/U CABLE TO THE PART DESCRIPTION |
| C    | 07/12/11 | 2130    | TITLE WAS CHANGED                        |

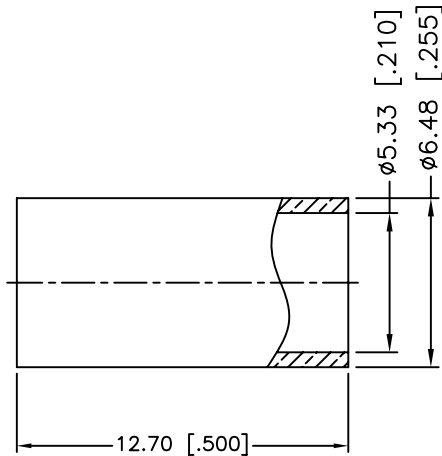

1. CRIMPED FERRULE  
HEX CRIMP SIZE .216"
2. CRIMPED CONTACT PIN  
HEX CRIMP SIZE .068"

|   |             |                 |         |     |
|---|-------------|-----------------|---------|-----|
| 5 | FERRULE     | COPPER          | NICKEL  | 1   |
| 4 | CONTACT PIN | PHOSPHOR BRONZE | GOLD    | 1   |
| 3 | INSULATOR   | PTFE            | NATURAL | 1   |
| 2 | BODY        | BRASS           | NICKEL  | 1   |
| 1 | HOUSING     | BRASS           | NICKEL  | 1   |
|   | DESCRIPTION | MATERIAL        | FINISH  | QTY |

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE  
IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN  
INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED  
TOLERANCES FOR MILLIMETERS ARE:  
0.5 - 8mm  $\pm$  0.20mm  
8 - 30mm  $\pm$  0.40mm  
30 - 120mm  $\pm$  0.50mm

UNLESS OTHERWISE SPECIFIED  
TOLERANCES FOR INCHES ARE:  
.020 - .315  $\pm$  0.007"  
.315 - 1.180  $\pm$  0.015"  
1.180 - 4.724  $\pm$  0.020"

DO NOT SCALE DRAWING

| APPROVALS    | DATE                 |
|--------------|----------------------|
| DRAWN S.LI   | 07/12/11'            |
| CHECKED      |                      |
| ISSUED       |                      |
| SHEET 1 OF 1 |                      |
| CAD FILE     | C:/CONNEX/122122.DWG |

# Amphenol Connex

PART DESCRIPTION

TNC CRIMP JACK  
(FOR RG-58C/U CABLE)

PART NO.

122122

DWG. NO. 122122.DWG

REV. C

SIZE A

SCALE NA