


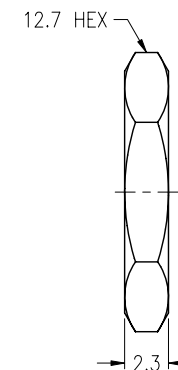

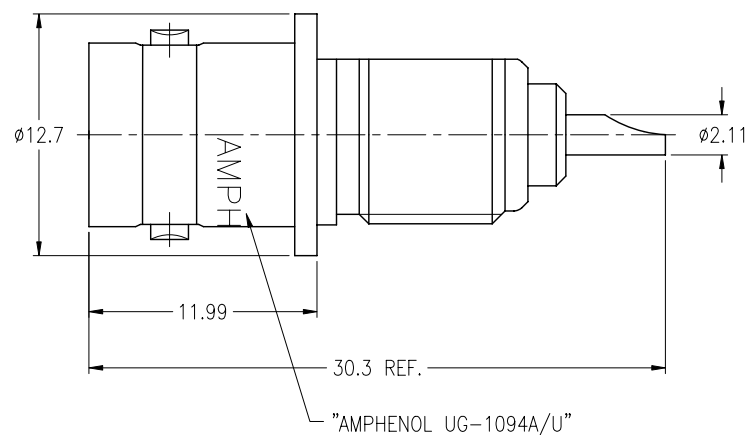
NOTES:

- MATERIALS AND FINISHES(PLATING THICKNESS IN MICRO-INCHES):
BODY – BRASS, NICKEL PLATING
CONTACT – PHOSPHOR BRONZE, SILVER PLATING
INSULATOR – PTFE
- ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC–4 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
- MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: – 65°C to +165°C

THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A2	SEE SHEET 1	29-Oct-02	--	--
A3	SEE SHEET 1	30-Oct-02	--	TONY
T	PN.31-10191 WAS 31-10191PB\RD-DM10082602S4	29-Nov-10	48193	SH
U	STAMP "AMPHENOL" WAS "74868"\RD-DM11120601R3	26-Dec-11	48844	SH

RECOMMENDED
MOUNTING HOLE

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: < 0.5mm 0.5 – 6mm 6 – 30mm 30 – 120mm ANGLES ±0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1°	MATERIAL	DRAWN	DATE	TITLE		Amphenol RF	
		R.MAO	12-Dec-11			Danbury CT USA, Tainan Taiwan, Shenzhen China	
		ENGINEER	DATE	BNC BULKHEAD RECEPT. JACK		www.amphenolrf.com	
		NANCY	06-Jan-03			DRAWING NO. 31-2221	
NOTICE – These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	REFERENCE	APPROVED	DATE	SCALE: 2.5/1	SHEET 2 OF 2	ITEM NO.	31-2221
		S.HSIEH	12-Dec-11			PART NO.	31-2221
		CAD FILE				DWG SIZE	REV
FINISH		F:\DWG\CNPD\31\2221-USZ		B	U		