

EGK^{PAT.}

Grounding Kits

GROUNDING KITS
PRODUCT CATALOGUE




▲ EGK
Open

▲ EGK
Closed

MATERIAL	
Shell	PA 6, U.V. Resistant
Sealant	Isobutylene Strip
Inner Contact	Tinned Brass
Cable**	16 mm ² Copper, Black PVC Insulated, Conforming to CEI 20-22 Norms (yellow/green on request)
Lug	Tinned Copper, ø 8 hole (* ø10 on request)

CERTIFICATION	
IEC 60529 Fimo Test	Waterproof IP 68
Contact Resistance	<1 mOhm

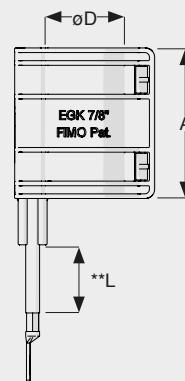

EGK
No Tool Compact Grounding Kit With Plastic Shell

For Copper or Aluminum RF coaxial cables.
Parallel cable exit.

Technical features:

- Compact plastic structure
- Fast and easy installation, without the use of tools
- No loose parts
- No lubricant required
- No extra taping needed

EGK
Kit di Terra Compatto con Guscio in Plastica, Installazione Senza Utensili.

Per cavi coassiali RF, in rame o alluminio. Uscita parallela.

Caratteristiche:

- Struttura compatta in plastica
- Installazione veloce senza l'utilizzo di utensili
- Senza parti sciolte
- Lubrificante non necessario
- Nastratura supplementare non necessaria

CODE	ARTICLE	FOR COAXIAL CABLES	øD	**L	BOX	WEIGHT
61 1508 0012	EGK 1/2" M	ø d 16-17 (1/2")	26.5	500	10	145
61 1508 0078	EGK 7/8" M	ø d 26-28 (7/8" + 7/8" superflex)	37.5	500	10	152
61 1508 0114	EGK 1.1/4" M	ø d 38-40 (1.1/4")	49.5	500	10	158
61 1508 0158	EGK 1.5/8" M	ø d 50-52 (1.5/8")	61.5	500	10	165