ГК Атлант Инжиниринг - официальный представитель в РФ и СНГ
+7 (495) 109-02-08 sales@bbrc.ru www.bbrc.ru

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
D	B–8	NO.6 WAS CHANGED\RD–DM91091701L\11–12–02'
D1	B–6	CANCELLED L AND M KEY CODING\N/A\02–13–03'
E	C–4	ADD 4 ROUND RIBS ON CLIP, FKLC00001B WAS FKLC00001A \RD–DM06032401B\ 24–Mar–06
E1	B–4	ADDED: ±0.20, REMOVED 8mm\ECO\8–05–06'
F	B–6	ADDED L M N KEY CODING \RD–DM93081001L\ 27–Sep–07

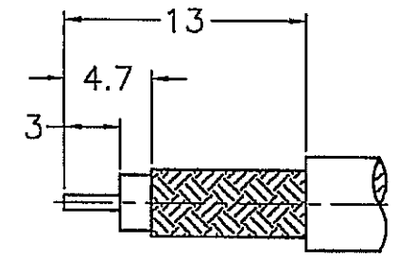

RECOMMENDED
CABLE STRIPPING DIM'S
（建議剝線尺寸）

1. CRIMPED FERRULE
   HEX. CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
   SQ. CRIMP SIZE .042"

CONFIGURATION CONTROL:
NO CHANGES PERMITTED TO DRAWING WITHOUT
PPAP QUALIFIED CUSTOMER APPROVAL

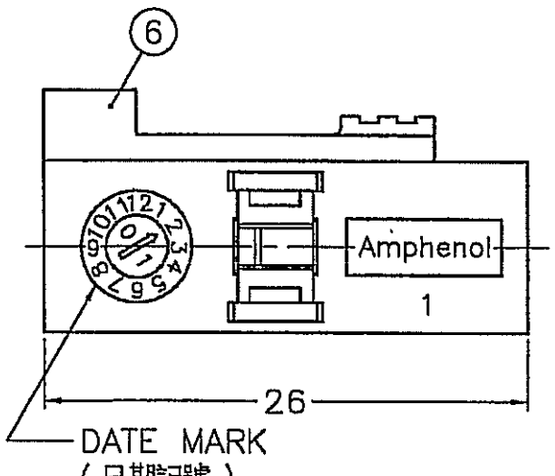

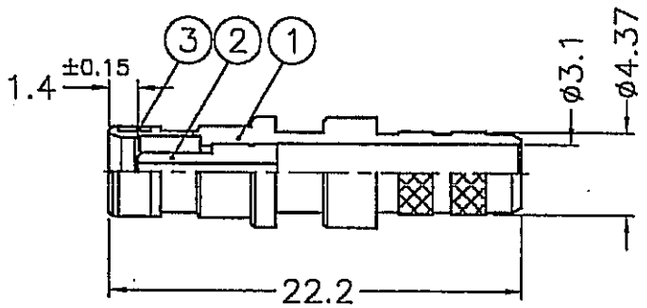



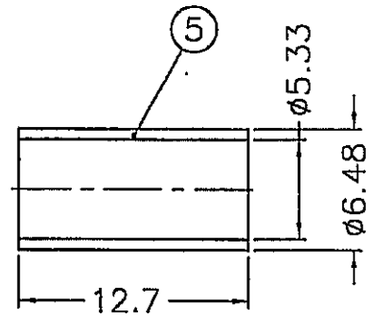

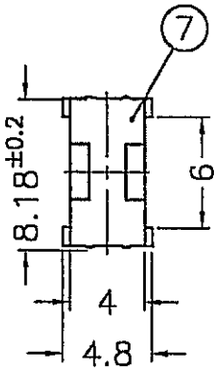

NOTES: FINISH (PLATING THICKNESS IN MICRO–INCHES)
1. BRASS PER QQ–B–626, ALLOY 360, 1/2 H ; JIS H3250 C 3604BD OR EQUIVALENT
2. NICKEL PL. 60 MIN. THICK OVER COPPER STRIKE
3. BERYLLIUM COPPER PER QQ–C–530, ALLOY 173, 1/2 H ; FUJII FX301 OR EQUIVALENT
4. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
5. TEFLON MIL–P–19468 OR EQUIVALENT
6. BERYLLIUM COPPER JIS C1720R–1/4H OR EQUIVALENT
7. COPPER PER ASTM B–75 ALLOY C12200 OR EQUIVALENT
8. NYLON66(WITH 33% GLASS FIBER) PER NYTEX COMPOSITES CO., LTD. GRADE MG–0033N–V0 OR EQUIVALENT
9. PBT(WITH 15% GLASS FIBER) PER CHANG CHUN GRADE 4115202

TABLE

KEY CODING	PART NO.	DRAWING NO.	ITEM NO.	LOCK COVER
A	FA1–NASJ–C04–0	FK6121AW–008–NT30G–50	FK6121AAA57NC5F	FKLC30101D
B	FA1–NBSJ–C04–0	FK6121BW–008–NT30G–50	FK6121AAB57NC5F	FKLC30102D
C	FA1–NCSJ–C04–0	FK6121CW–008–NT30G–50	FK6121AAC57NC5F	FKLC30103D
D	FA1–NDSJ–C04–0	FK6121DW–008–NT30G–50	FK6121AAD57NC5F	FKLC30104D
E	FA1–NESJ–C04–0	FK6121EW–008–NT30G–50	FK6121AAE57NC5F	FKLC30105D
F	FA1–NFSJ–C04–0	FK6121FW–008–NT30G–50	FK6121AAF57NC5F	FKLC30106D
G	FA1–NGSJ–C04–0	FK6121GW–008–NT30G–50	FK6121AAG57NC5F	FKLC30107D
H	FA1–NHSJ–C04–0	FK6121HW–008–NT30G–50	FK6121AAH57NC5F	FKLC30108D
I	FA1–NISJ–C04–0	FK6121IW–008–NT30G–50	FK6121AAI57NC5F	FKLC30109D
K	FA1–NKSJ–C04–0	FK6121KW–008–NT30G–50	FK6121AAK57NC5F	FKLC30110D
Z	FA1–NZSJ–C04–0	FK6121ZW–008–NT30G–50	FK6121AAZ57NC5F	FKLC30111D
L	FA1–NLSJ–C04–0	FK6121LW–008–NT30G–50	FK6121AAL57NC5F	FKLC30112D
M	FA1–NMSJ–C04–0	FK6121MW–008–NT30G–50	FK6121AAM57NC5F	FKLC30113D
N	FA1–NNSJ–C04–0	FK6121NW–008–NT30G–50	FK6121AAN57NC5F	FKLC30114D

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
7	LOCK COVER	NOTE 9	NATURAL	1	FKLC00001B
6	LOCK COVER	NOTE 8		1	SEE TABLE
5	FERRULE	NOTE 7	NOTE 2	1	FKFR00201A
4	CONTACT PIN	NOTE 3	NOTE 4	1	FKCP00401A
3	RETAINER RING	NOTE 6	NATURAL	1	FKRR00101A
2	INSULATOR	NOTE 5	NATURAL	1	FKNS00501A
1	BODY	NOTE 1	NOTE 2	1	FKBD00501A

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5–6 = ±0.2
6–30 = ±0.4
30–120 = ±0.6
120–315 = ±1
315–1000 = ±1.6
1000–2000 = ±2.4

SCALE 2/1 ISSUE F

PART NO. FA1–NXSJ–C04–0
APPROVED Angela W DATE 28-Sep-07
CHECKED Angela W DATE 28-Sep-07
DRAWN Evan DATE 27–Sep–07
FILE NO. F:\DWG\FK\6121XX\008\50\NT30G–FSZ

Amphenol
Danbury,CT,USA–Tainan,Taiwan–Shenzhen,China

TITLE FAKRA SMB CRIMP JACK (FOR RG–58A/U, 58C/U CABLE)
DRAWING NO. FK6121XX–008–NT30G–50
ITEM NO. FK6121AAX57NC5F